


REGMATIC

3/2 Way Namur Mount Solenoid Valve Series 23

Article No	Voltage
23024AC	24 V AC
23110AC	110 V AC
23220AC	220 V AC
23024DC	24VDC
23048DC	48 V DC
23110DC	110 V DC

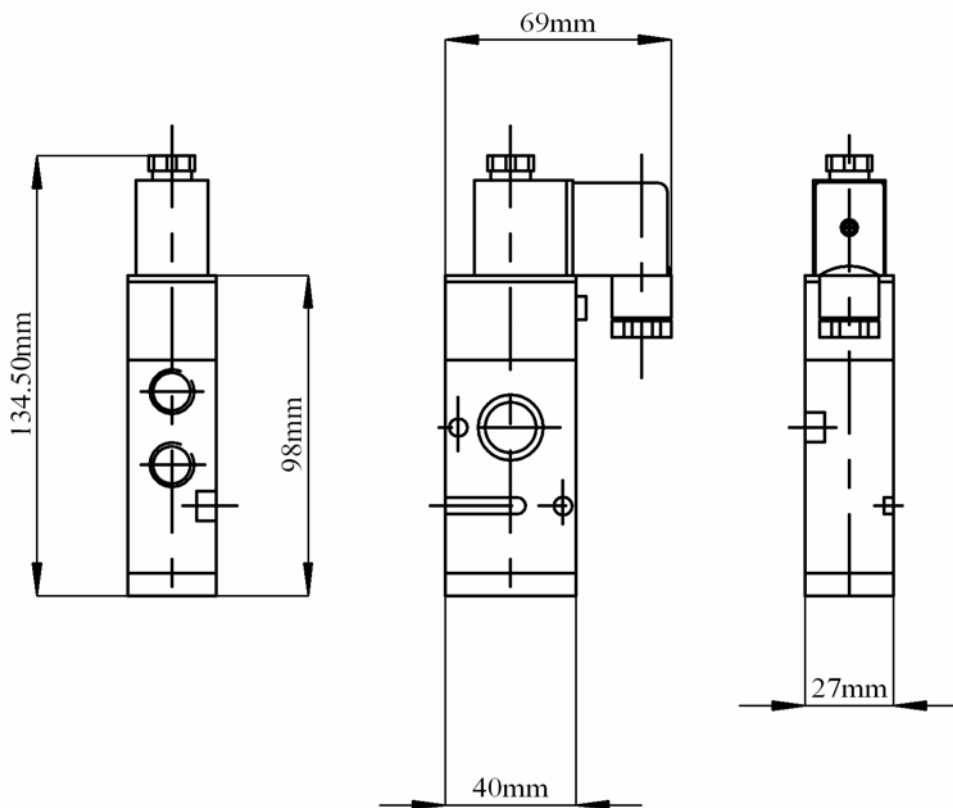

Technical data:

Protection class IP 65
 Relative duty cycle 100 %
 Voltage tolerance +/- 10 %

Working pressure 1.5-8Bar
 Area 14 mm², cv = 0.78
 Power consumption AC = 5.5 VA, DC = 4.8 W

Approvals by ATEX, CSA and UL

Can also be supplied with coils for EEx ia 11 T6 and T4 and
 EEx m 11 T4

CeeVee Ltd

Wpku'G9'('G:
 Kfej dtqqm'Vtcf lpi 'Gucvg.'Y qqf ej guvgt.
 Utqwf.'T rquOI N7'7Gf
 Vgri'23675': 5536: 'kphqB egg/xgg0eq0wm